



EXCELLENCE IN STRAPPING SOLUTIONS

RO-M FUSION

Quality makes the difference



The RO-M FUSION offers

- super-soft strapping
 - higher strapping speeds
 - 2 sturdy, smooth-running foot pedal.
- Functional, easy-to-operate control panel,
pivoting stepless 0 - 90 degrees

RO-M FUSION

STANDARD FEATURES

- Thermostatically controlled heat-weld sealing
- Wear-free DC drive, brushless motor technology
- Strap end detection with ejection of remaining strap
- Easy strap coil change and threading system
- Toggle switch for super soft strapping of individual or very soft packages
- Wear-free, controlled strap track system
- Adjustable strap tension via potentiometer
- Energy-saving drives
- Electronic control
- Hinged front table top
- Sturdy foot pedal for cycle start
- 4 castors of which 2 are lockable
- Structural coating in RAL 5010, gentian blue
- Table top length 600 mm or alternatively 800 mm

OPTION:

- E-package: Automatic strap release via light sensor with selection of single or permanent strapping and strap tension control via light barrier. Three different strap tensions are explicitly storable by the customer.

TECHNICAL DATA

STRAPPING CAPACITY:

With 5 mm straps up to 55 cycles per minute

FRAME SIZE:

800 mm x 600 mm
600 mm x 500 mm

STRAPS:

Standard machine grade 5, 8 or 12 mm PP strap

STRAP COIL DISPENSER:

Core diameter: 200 mm

Core width: 190 mm

ELECTRICITY:



Voltage: 230 V, 50/60 Hz, 1 PH

Power consumption: approx. 0.2 kW

SEALING UNIT:

Standard 3 sealing unit

	A	B	C	D
600 x 500	990	600	500	1370 – 1475
800 x 600	1190	800	600	1470 – 1575

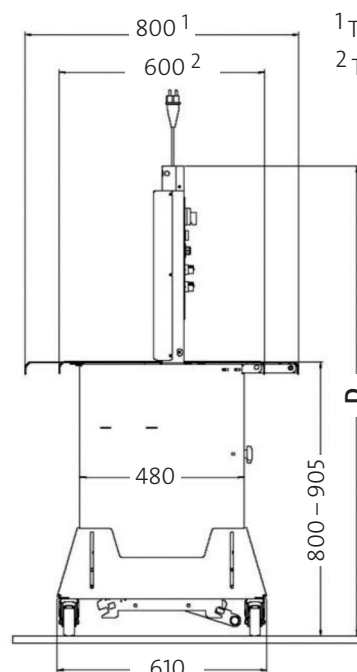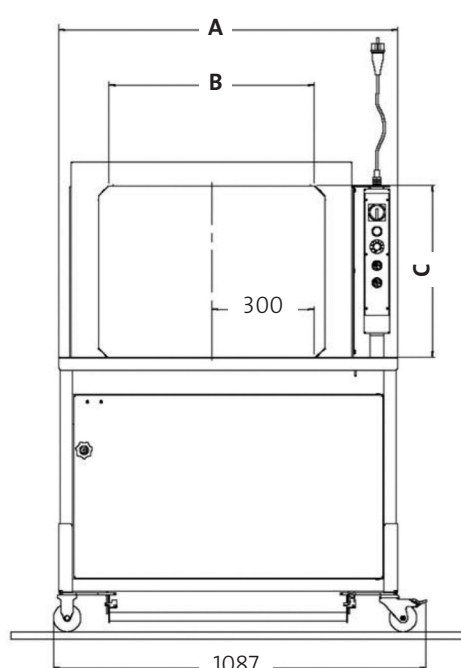

¹ Table plates extended (Option)

² Table plates standard

04 / 14 Subject to Alterations



MOSCA®
EXCELLENCE IN STRAPPING SOLUTIONS

MOSCA GMBH

Gerd-Mosca-Straße 1
D-69429 Waldbrunn/Germany
Tel.: +49 6274/932-0
Fax: +49 6274/932-400 118
Tel. Tech. Service: +49 6274 / 932-146
E-Mail: info@mosca.com
Internet: www.mosca.com

The models of RO-M FUSION are adjustable to one strap width of all quality PP straps of 5, 8 or 12 mm. Obtainable directly from Mosca, produced in one of Europe's most modern manufacturing plants. Combinable with maintenance contracts by Mosca – a one-stop solution.

