

EVOLUTION

The cost-efficient strapping solution

MOSCA

SONIXS TR-6 BASE Fully Automatic Strapping Machine

((

SoniXs TR-6 BASE

STANDARD FEATURES

- Ultrasonic sealing system with electronic self-calibration
- Can be integrated into most production lines
- High-end Standard 6 sealing unit
- Easy accessibility and tool-free disassembly of strap way components
- Bundle positioning via increments by metrical input of the strapping positions
- Easy operation over digital display in the control panel
- Selector switch for single, double or multiple strapping
- Potential-free contacts to up-stream and down-stream systems
- Open design without protective coverings CE marking • inclusive conformity declaration
- Extremely low energy consumption

OPTIONS

- Product transport via roller table
- Cost-efficient, pneumatical backstop
- Cost-efficient, pneumatical hold-down device
- Table extension up to 60, 110 or 220 mm
- Automatic adjustment of the strap tension by package height detection

TECHNICAL DATA

Performance:

Up to 35 packages per minute (600 x 600 mm)

STRAPS:

Standard machine grade 5-12 mm wide PP straps

STRAP COIL DISPENSER:

Core diameter:	200 mm
Core width:	190 mm


ELECTRICITY:

Network data:	100 – 240 V, 50/60 Hz , 1 PH*
Power consumption:	0.30 kW

WEIGHT:

385 kg (600 x 600 mm, incl. hold-down device & backstop)

* Country-specific adaption possible

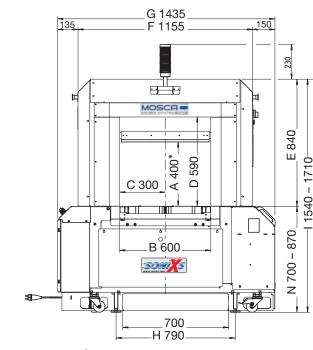


* 400 mm by pneumatic hold-down device

04 / 14 Subject to Alterations

The models of SoniXs TR-6 BASE are adjustable to one strap width of all quality PP straps between 5 and 12 mm. Obtainable directly from Mosca, produced in one of Europe's most modern manufacturing plants. Combinable with maintenance contracts by Mosca a one-stop solution.



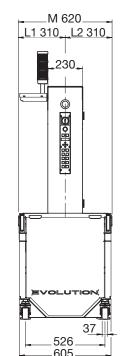

Layout SoniXs TR-6 BASE / 600 mm x 600 mm



MOSCA GMBH

Gerd-Mosca-Straße 1 D-69429 Waldbrunn/Germany Tel.: +49 6274/932-0 Fax: +49 6274/932-400 118 Tel. Tech. Service: + 49 6274 / 932-146 E-Mail: info@mosca.com Internet: www.mosca.com

230